

SPHERE I (E12)

SKU: SPHR-G50-4W-2000/2800K-E12-MP-120V

tala

3.8 WATT | 220 LUMENS | 2000K TO 2800K

Decorative, dim to warm LED lightbulb. This lamp uses 3.8 Watts of power and achieves 220 Lumens at a CRI of 95. It has an IP54 rating.

DIM TO WARM
TECHNOLOGY



LAMP

Shape: G16 (USA)
Materials: Soda-lime Glass and Brass Cap
Finish: Matte White
Beam angle: 360°
Base: E12
Weight: 17 g
Working temperature: -5°C to 40°C
Warm up time: Instant
Warranty: 3 years
Input Voltage: 110-120V | 50/60Hz




BULB DIMENSIONS

2 x 3.2 in
(Width x Length)

PERFORMANCE

CRI (colour rendering index)	95
Lamp lumen output	220 lm
Flicker	<5%
Lumens per circuit watt (LM/W)	58 lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2000K - 2800K
Power factor	0.9

POLAR DIAGRAM

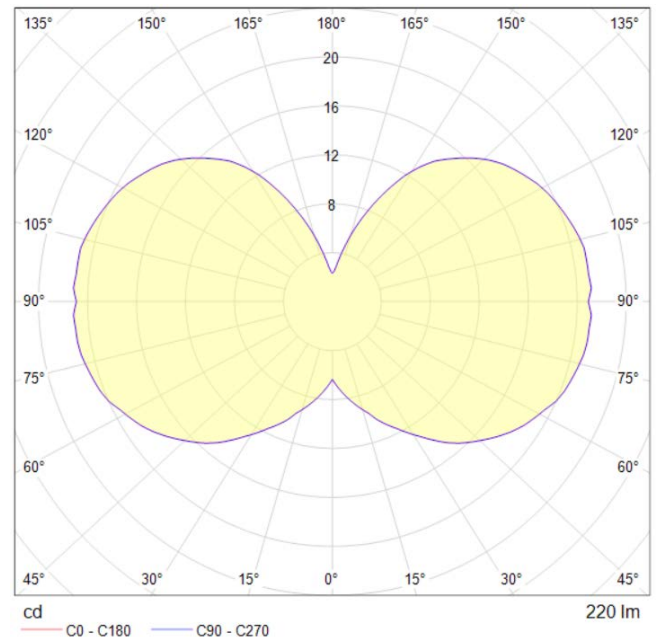

DIMMING

Dimmable: Yes
Dimming type: Leading edge or Trailing edge
Recommended Dimmer: Lutron DVELV-300P
A full list of compatible dimmers is available on our website: us.tala.co.uk/recommended-dimmers/

IES/LDT FILE

Available upon request.

EAN US: 5060400152896



us.tala.co.uk | hello@tala.co.uk | +1 (929) 294-9574

Specification subject to change without notice. Refer to our website for the most recent product documentation.

SPHERE I (E26)

SKU: SPHR-G50-4W-2000/2800K-E26-MP-120V

tala

3.8 WATT | 220 LUMENS | 2000K TO 2800K

DIM TO WARM
TECHNOLOGY

Decorative, dim to warm LED lightbulb. This lamp uses 3.8 Watts of power and achieves 220 Lumens at a CRI of 95. It has an IP54 rating.



LAMP

Shape: G16 (USA)
Materials: Soda-lime Glass and Brass Cap
Finish: Matte White
Beam angle: 360°
Base: E26
Weight: 23 g
Working temperature: -5°C to 40°C
Warm up time: Instant
Warranty: 3 years
Input Voltage: 110-120V | 50/60Hz




BULB DIMENSIONS

2 x 3.3 in
(Width x Length)

PERFORMANCE

CRI (colour rendering index)	95
Lamp lumen output	220lm
Flicker	<5%
Lumens per circuit watt (LM/W)	58m/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2000K - 2800K
Power factor	0.9

POLAR DIAGRAM

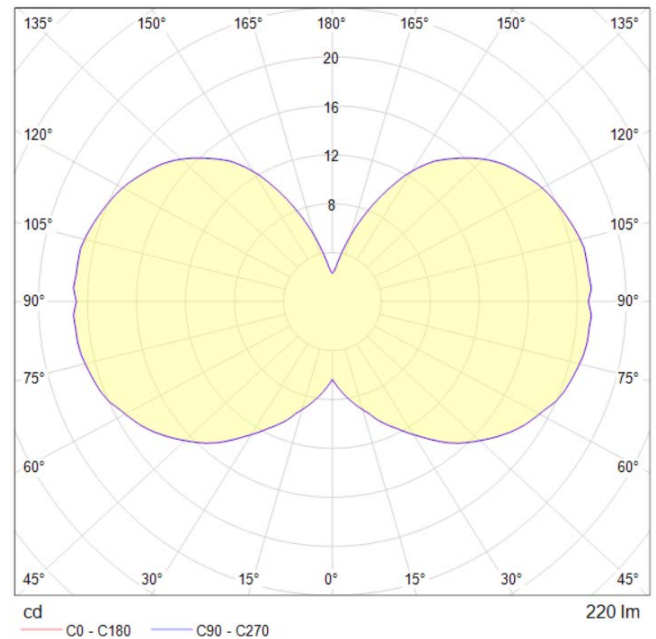

DIMMING

Dimmable: Yes
Dimming type: Leading edge or Trailing edge
Recommended Dimmer: Lutron DVELV-300P
A full list of compatible dimmers is available on our website: us.tala.co.uk/recommended-dimmers/

IES/LDT FILE

Available upon request.

EAN US: 5060400152919



SPHERE II

SKU: SPHR-G75-6W-2000/2800K-E26-MP-120V

tala

6 WATT | 480 LUMENS | 2000K TO 2800K

DIM TO WARM
TECHNOLOGY

Decorative, dim to warm LED lightbulb. This lamp uses 6 Watts of power and achieves 480 Lumens at a CRI of 95. It has an IP54 rating.



LAMP

Shape: G24 (USA)
Materials: Borosilicate Glass and Brass Cap
Finish: Matte White
Beam angle: 360°
Base: E26
Weight: 82 g
Working temperature: -5°C to 40°C
Warm up time: Instant
Warranty: 3 years
Input Voltage: 110-120V | 50/60Hz




BULB DIMENSIONS

2.9 x 3.9 in
(Width x Length)

PERFORMANCE

CRI (colour rendering index)	95
Lamp lumen output	480lm
Flicker	<5%
Lumens per circuit watt (LM/W)	80lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2000K - 2800K
Power factor	0.9

POLAR DIAGRAM

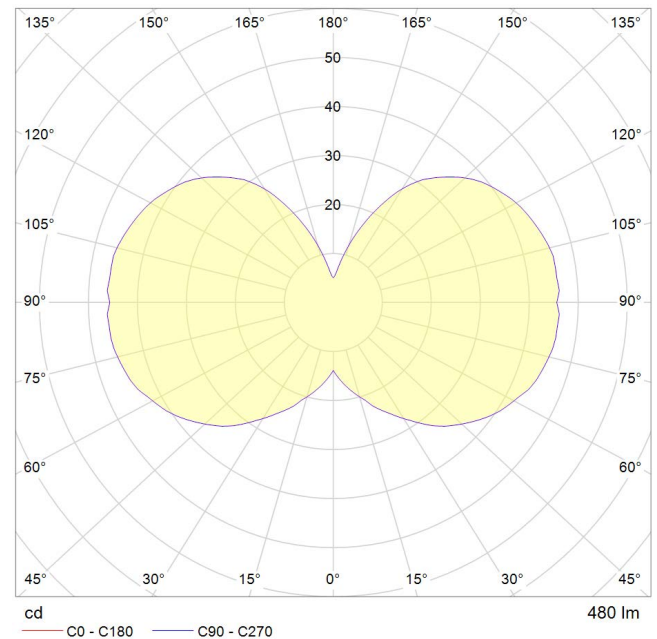

DIMMING

Dimmable: Yes
Dimming type: Leading edge or Trailing edge
Recommended Dimmer: Lutron DVELV-300P
A full list of compatible dimmers is available on our website:
us.tala.co.uk/recommended-dimmers/

IES/LDT FILE

Available upon request.

EAN US: 5060400152933



us.tala.co.uk | hello@tala.co.uk | +1 (929) 294-9574

Specification subject to change without notice. Refer to our website for the most recent product documentation.

SPHERE III

SKU: SPHR-G100-7W-2000/2800K-E26-MP-120V

tala

7 WATT | 600 LUMENS | 2000K TO 2800K

Decorative, dim to warm LED lightbulb. This lamp uses 7 Watts of power and achieves 600 Lumens at a CRI of 95. It has an IP54 rating.

DIM TO WARM
TECHNOLOGY



LAMP

Shape: G31 (USA)
Materials: Borosilicate Glass and Brass Cap
Finish: Matte White
Beam angle: 360°
Base: E26
Weight: 116 g
Working temperature: -5°C to 40°C
Warm up time: Instant
Warranty: 3 years
Input Voltage: 110-120V | 50/60Hz




BULB DIMENSIONS

3.9 x 5.4 in
(Width x Length)

PERFORMANCE

CRI (colour rendering index)	95
Lamp lumen output	600lm
Flicker	<5%
Lumens per circuit watt (LM/W)	86lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2000K - 2800K
Power factor	0.9

POLAR DIAGRAM

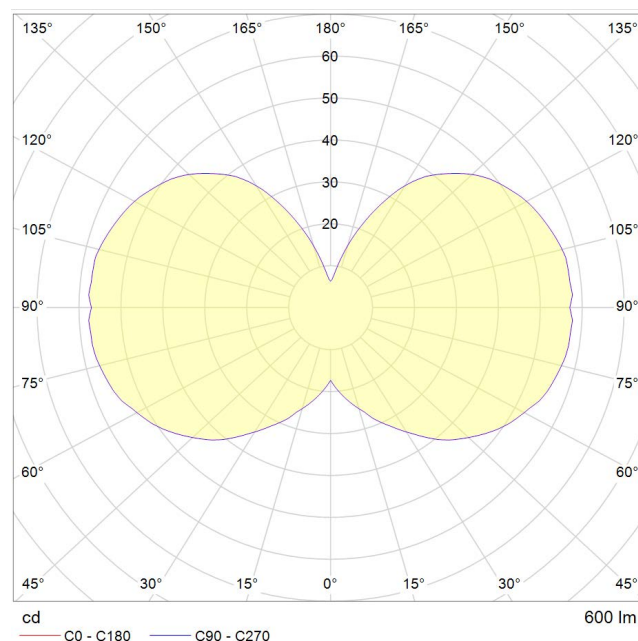

DIMMING

Dimmable: Yes

Dimming type: Leading edge or Trailing edge

Recommended Dimmer: Lutron DVELV-300P

A full list of compatible dimmers is available on our website: us.tala.co.uk/recommended-dimmers/

IES/LDT FILE

Available upon request.

EAN US: 5060400152858



SPHERE IV

SKU: SPHR-G150-8W-2000/2800K-E26-MP-120V

tala®

8 WATT | 680 LUMENS | 2000K TO 2800K

Decorative, dim to warm LED lightbulb. This lamp uses 8 Watts of power and achieves 680 Lumens at a CRI of 95. It has an IP54 rating.

DIM TO WARM
TECHNOLOGY



LAMP

Shape: G47 (USA)
Materials: Borosilicate Glass and Brass Cap
Finish: Matte White
Beam angle: 360°
Base: E26
Weight: 180 g
Working temperature: -5°C to 40°C
Warm up time: Instant
Warranty: 3 years
Input Voltage: 110-120V | 50/60Hz




BULB DIMENSIONS

5.9 x 7.5 in
(Width x Length)

PERFORMANCE

CRI (colour rendering index)	95
Lamp lumen output	680lm
Flicker	<5%
Lumens per circuit watt (LM/W)	85lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2000K - 2800K
Power factor	0.9

POLAR DIAGRAM

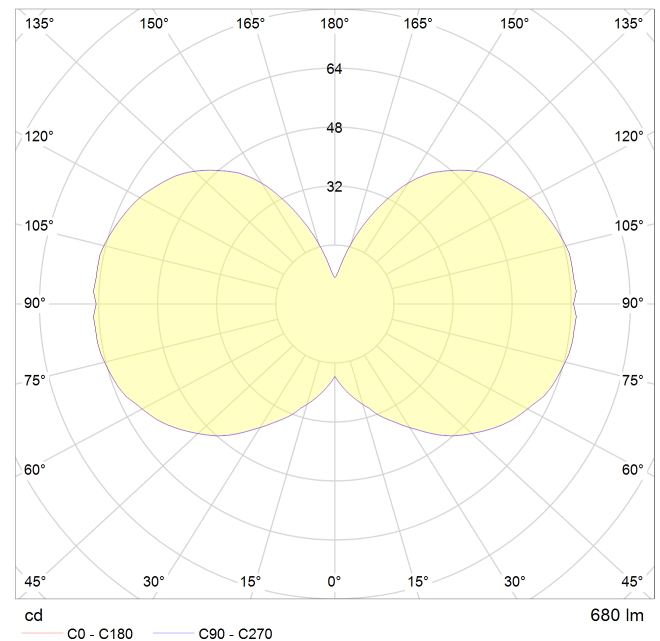

DIMMING

Dimmable: Yes
Dimming type: Leading edge or Trailing edge
Recommended Dimmer: Lutron DVELV-300P
A full list of compatible dimmers is available on our website:
us.tala.co.uk/recommended-dimmers/

IES/LDT FILE

Available upon request.

EAN US: 5060400152872



us.tala.co.uk | hello@tala.co.uk | +1 (929) 294-9574

Specification subject to change without notice. Refer to our website for the most recent product documentation.